

VE606R



- DVI Over Cat 5 Receiver Wall Plate
 - The VE606R DVI Over Cat 5 Receiver Wall Plate connects to a VE156T to extend signals up to 60m from the source using Cat 5e cables. It supports popular wide screen formats and ensures excellent video quality over long distance transmissions. The VE606 combination can further extend the distance or multiply sources/displays.
- The VE606R can be powered from the Transmitter via a second Cat 5e cable to transmit the power signal. The VE606's compact wall plate design does away with bulky cables and allows a neat and convenient installation. It is an ideal solution for meeting rooms, museums and any environment that requires equipment or cabling to be kept hidden from public view.



Features

- Remotely powered from the Transmitter **
- Extends the distance between DVI source and DVI display
- Superior video quality - up to 1080p@60Hz (40m), 1080i@60Hz (60m)
- 8 segment equalization adjustment switch optimizes display quality
- Supports wide screen formats
- Supports hot-plugging
- Decora type design is easily configurable to fit various wall plates
- LED indication of power sources / connection status
- Supports stereo audio
- Built-in 8KV/15KV ESD protection
- Easy installation

- Wall mountable type for a neat and cleaner installation
- Plug-and-play - no software installation required

Note:


* A second Cat 5e cable connection is required to remotely power on the Transmitter.

** A power adapter is provided with this package that can be used at the Transmitter, which in turn can remotely power the other unit.

Specification

Video Output	Interface	1 x DVI-D Female (White)
	Impedance	100 Ω
Video	Max. Data Rate	6.75 Gbps (2.25 Gbps Per Lane)
	Max. Pixel Clock	225 MHz
	Compliance	HDCP Compatible
	Max. Resolutions / Distance	Up to 1920 x 1200@40m; 1280 x 1024@60m
Audio	Output	1 x Mini Stereo Jack Female (Green)
Power		Connector: 1 x Terminal Block (Green) Consumption: 9 VDC, 2.9W
Environment	Operating Temp.	0 - 50°C
	Storage Temp.	-20 - 60°C
	Humidity	0-80% RH, Non-Condensing
Physical Properties	Housing	Metal
	Weight	0.17 kg
	Dimensions (L x W x H)	10.11 x 4.44 x 4.34 cm
Carton Lot		5 pcs

Diagram

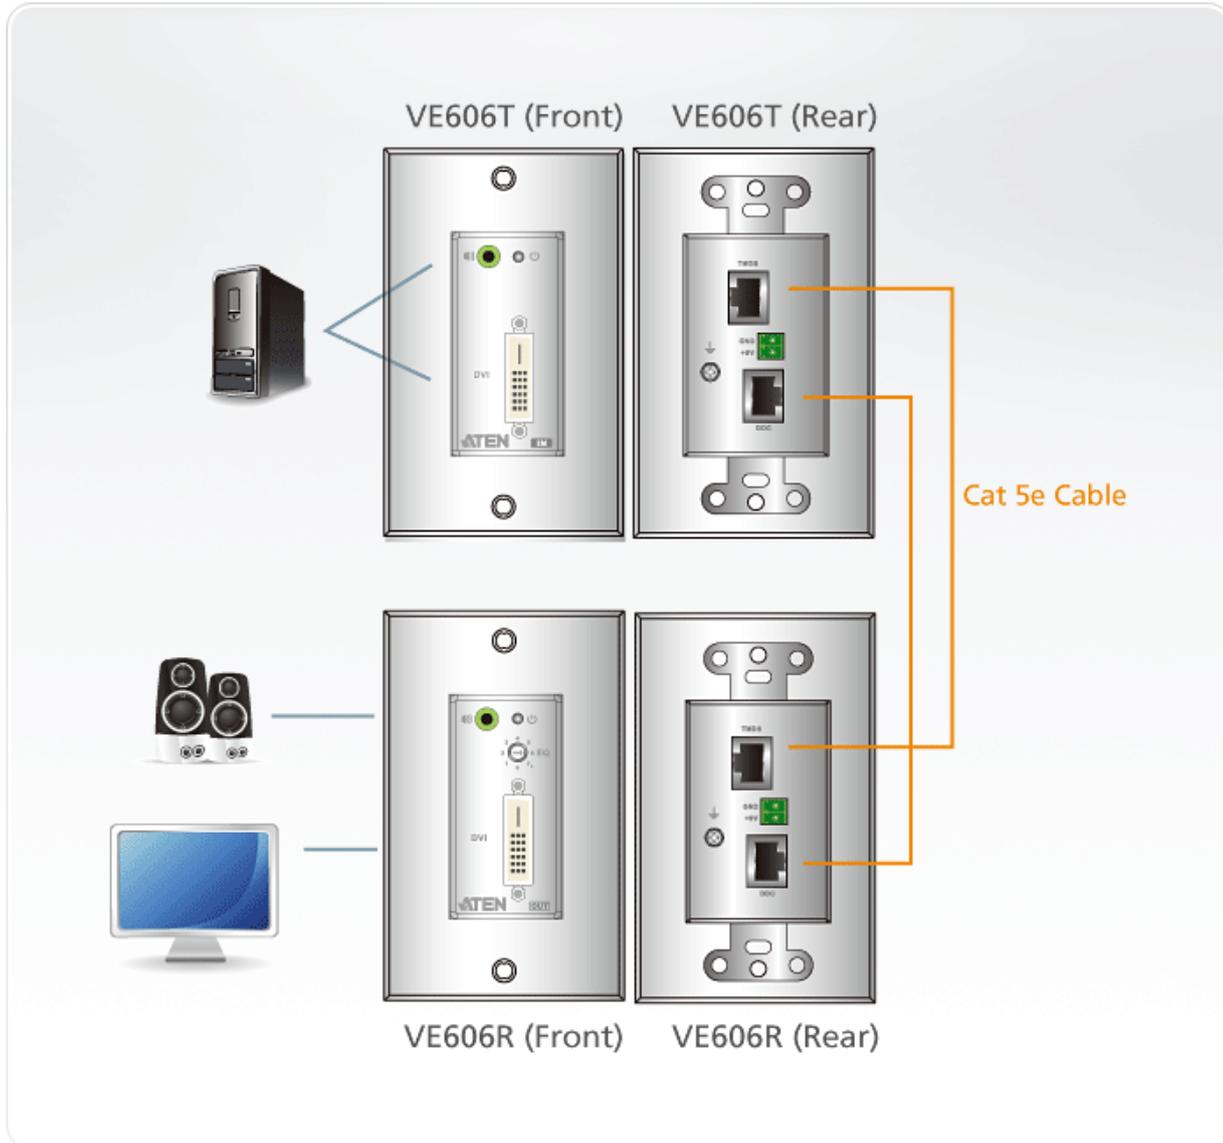

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2016 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.
